




Power you can trust

20 kVA HONDA POWERED PETROL GENERATOR

WITH ELECTRIC START

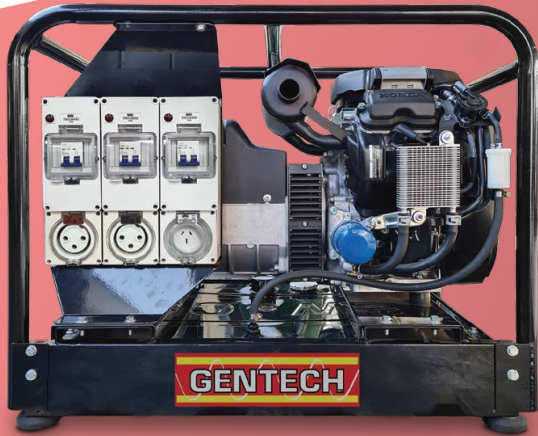

MODEL NO:

EP20000HSRE

TECHNICAL SPECIFICATIONS

Power Rating:	20 kVA
Alternator Rating:	20kVA
Engine Model:	Honda iGX800 Fuel Injected
Phase:	1 phase
Starting System:	Electric
Fuel Tank Capacity:	34 L
Noise Level @ 7m:	75 dBA
Outlets:	2 x 32 Amp 3 Pin with Circuit Breaker 1 x 15 Amp 3 Pin with Circuit Breaker
Volts:	230 V
Fuel Consumption:	6.88 L/Hr @ 80% Load
Operation Hours:	6.15 hrs @ 80% Load
Fuel Type:	Petrol
Dimensions (L x W x H):	880 x 550 x 710 mm
Weight:	160 kg

Specifications and product availability subject to variation without notice.

If you're in need of serious power for large power tools or backing up your house, then look no further!

With EFI (**Electronic Fuel Injection**) for maximum fuel efficiency, enhanced reliability and improved start up.

This massive generator comes standard with **long range fuel tank, battery, centre point lift, 2 x 32 Amp and 1 x 15 Amp outlets with circuit breaker.**

POWERED by
HONDA



CONTACT US TODAY

1300 885 789 | paul@powergenaustralia.com.au
powergenaustralia.com.au

PowerGen
AUSTRALIA

PROUD SUPPLIER